


# PROFESSIONAL WOOD CARE FOR FLOORING

COMMERCIAL, RESIDENTIAL AND SPORT

Lacquer, oil, cleaning and maintenance

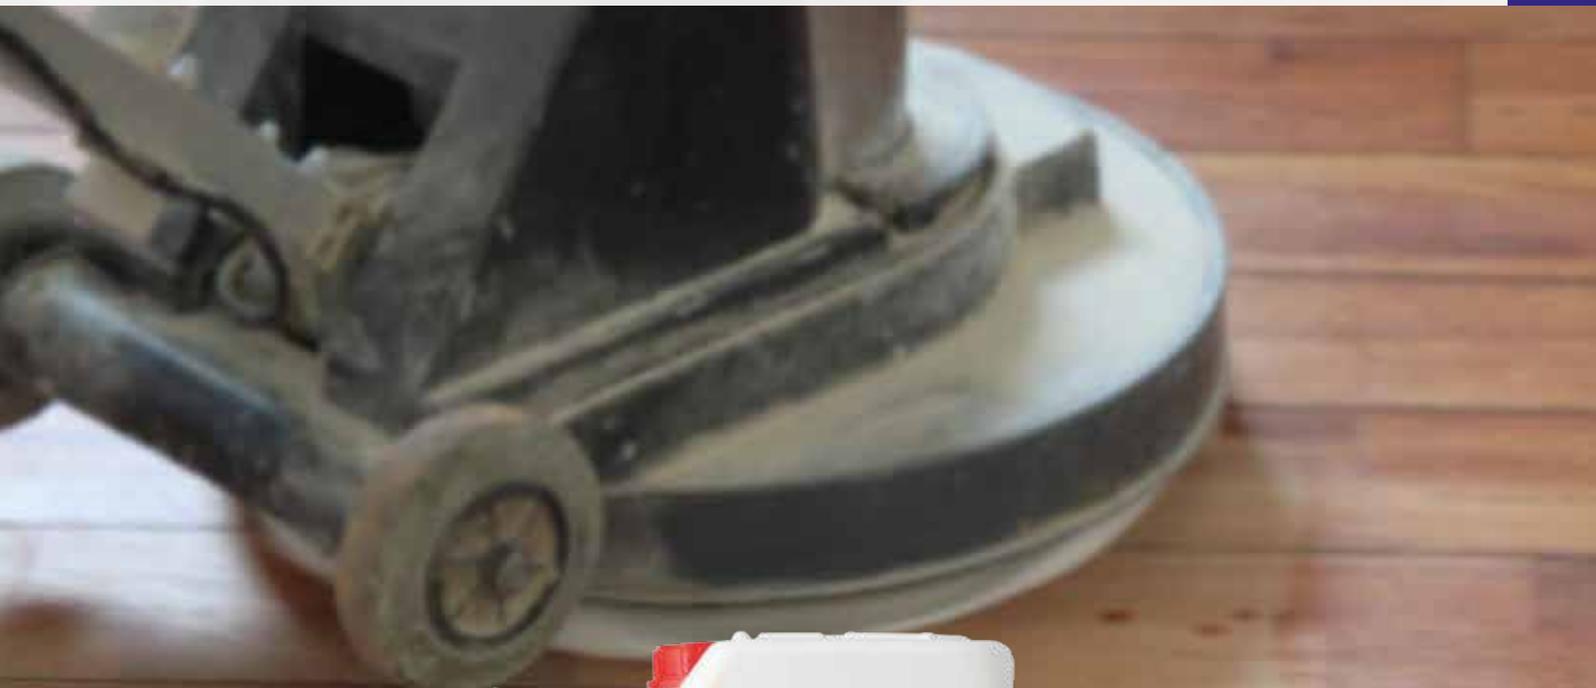

# WHY JUNCKERS?

## **Total solutions, always accompanied by professional technical support**

By choosing Junckers Wood Care you receive not only a product perfectly suited for surface treatment and protection of wooden floors, you are also drawing upon the expertise we have gained from our manufacture of solid hardwood floors since the 1930's.

The production of Junckers lacquers began in the 1950's and continues today at our main manufacturing plant in Denmark. Our range of lacquers and oils has always been developed by our own technical and research teams using the best and most up to date materials and technology.

Junckers Wood Care range includes a fully integrated range of products for regular maintenance, refurbishment or surface treatment of brand new wooden floors, meaning that we provide a 100% solution regardless of project type. We produce Wood Care products specially developed for residential, commercial and sports areas.

All our products are designed to help maintain a healthy indoor climate, be kind to the environment and to complement timber as a natural raw material. This means that our customer will get the full environmental and health benefits which hardwood floors offer.

During manufacture of Junckers Wood Care Solutions we use stringent quality control throughout. Our policy never to compromise on the quality of materials means that customers will always get the most durable and beautiful finish possible and contractors can be confident that they will be giving their customers the best possible result.

Finally, with Junckers as a professional partner you are sure to receive the correct technical support before, during and after a project. Junckers professional technical team together with our trained sales staff are always ready to assist you and help to ensure the successful completion of your project.





# CONTENTS

WHY JUNCKERS

3

FILLER AND PRIMING  
LACQUERS

4-5

FLOOR LACQUER FOR  
COMMERCIAL AND  
RESIDENTIAL USE

6-7

SPORT AND DANCE  
FLOOR LACQUERS AND  
MAINTENANCE PRODUCTS

8-9

OIL AND HARDWAX OIL

10-11

CLEANING AND  
MAINTENANCE PRODUCTS  
ACCESSORIES

12-13

GENEREL INFORMATION  
CLEANING AND MAINTENANCE

14-15

# FILLER AND PRIMING LACQUERS

JUNCKERS FILLER AND PRIMING LACQUERS form the basis for creating the most durable surface for a wooden floor. The products are always used in combination with a Junckers top-seal as part of our complete lacquer systems.

FILLER	JUNCKERS PREFILL	JUNCKERS BASEFILL
		
<b>i</b> DESCRIPTION	<p><b>A water-based acrylic filler base for filling gaps</b></p> <p>Mixed with sanding dust from the sanded floor, it is used for filling small gaps in floors. PreFill is quick drying and is to be used in combination with Junckers water-based priming and floor-finishing products.</p> <p>PreFill is the ultimate water-based solution for floors made of wood species sensitive to changes in humidity.</p>	<p><b>A quick-drying solvent-based filler for filling larger gaps</b></p> <p>Mixed with sanding dust from the sanded floor, it is used for filling gaps up to 2mm wide.</p> <p>BaseFill is used in combination with Junckers solvent-based or water-based lacquers, and is suitable for most sanded and untreated parquet floors, including most exotic wood floors.</p>
<b>e</b> APPEARANCE	Creamy/milky. When mixed with sanding dust it dries to the same colour as the wood.	Colourless. When mixed with sanding dust it dries to the same colour as the wood.
<b>w</b> COVERAGE	5-20 m <sup>2</sup> /litre depending on the condition of the floor.	10 m <sup>2</sup> /litre.
<b>t</b> PACKAGE SIZE	5 litres.	5 and 10 litres.
<b>L</b> DRYING TIME*	45-90 minutes.	Approx. 15 minutes.
<b>s</b> APPLICATION	Broad full-edged spatula stainless steel.	Broad full-edged spatula stainless steel.



PRIMERS



**JUNCKERS PRELAK  
CLEAR / WHITE**

**JUNCKERS BASEPRIME**

**JUNCKERS PROSEAL**

	<b>JUNCKERS PRELAK CLEAR / WHITE</b>	<b>JUNCKERS BASEPRIME</b>	<b>JUNCKERS PROSEAL</b>
<b>i</b> DESCRIPTION	<p><b>One-component water-based primer</b></p> <p>Minimises side-bonding for all wooden floors. PreLak dries quickly and is easy to sand. PreLak can be used with Junckers 1-pack and 2-pack water based finishes.</p> <p>For use with one of Junckers waterbaed lacquers.</p>	<p><b>An oil-based very fast curing primer</b></p> <p>For wooden floors where water-based primers cannot be use due to poor adhesion, for example exotic and oily timbers.</p> <p>BasePrime gives the floor more depth of colour and should only be used directly on to bare wood.</p> <p>For use with one of Junckers waterbaed lacquers or Protech.</p>	<p><b>An urethane oil-based primer for use with Junckers water-based HP lacquers or Protech.</b></p> <p>With Junckers ProSeal you can achieve a very rich and warm colour to the timber but avoiding the use of products which contain high levels of solvent. Over-coat with Junckers water-based HP Commercial or HP Sport lacquer.</p> <p>ProSeal will produce a colour very close to that of the Junckers factory finished boards.</p>
<b>e</b> APPEARANCE	<p>Junckers PreLak Clear: Creamy/milky. Dries up to a clear finish.</p> <p>Junckers PreLak White: Transparent white finish</p>	<p>Clear finish.</p>	<p>Gives depth of colour to hardwood.</p>
<b>u</b> COVERAGE	<p>PreLak Clear : 8 m<sup>2</sup>/litre.</p> <p>PreLak White: 10 m<sup>2</sup>/litre.</p>	<p>10 m<sup>2</sup>/litre.</p>	<p>10 m<sup>2</sup>/litre.</p>
<b>g</b> PACKAGE SIZE	<p>2½, 5 and 10 litres.</p>	<p>5-10 litres.</p>	<p>2½, 5 and 10 litres.</p>
<b>L</b> DRYING TIME*	<p>PreLak Clear: Approx. 1-2 hours.</p> <p>PreLak White: Approx. 4 hours.</p>	<p>Dry to touch after approx. 15 min.</p>	<p>Approx. 16 hours.</p>
<b>u</b> APPLICATION	<p>Short hair roller.</p>	<p>Brush or short-pile varnishing roller.</p>	<p>Brush, roller, air/airless spray.</p>

# FLOOR LACQUER

## FOR COMMERCIAL AND RESIDENTIAL USE

**JUNCKERS OFFERS A WIDE RANGE OF FLOOR LACQUERS** which have been specifically developed for residential and commercial use. The choice of product depends on expected levels of foot traffic. The wide choice of sheen levels makes it possible to obtain a finish which exactly suits your individual interior space. When lacquering floors which have been sanded to bare wood, use one of Junckers primers prior to applying the top coats of lacquer. This will help to prevent any gluing effect between the floor boards.

ONE-COMPONENT  
WATER-BASED FLOOR  
LACQUERS



	JUNCKERS PROFINISH	JUNCKERS STRONG	JUNCKERS STRONGPLUS
<b>i</b> DESCRIPTION	<p><b>One-component water-based co-polymer polyurethane/ acrylic lacquer</b></p> <p>Fast drying and curing lacquer for residential use. ProFinish is very easy to apply and non yellowing.</p>	<p><b>One-component water-based, hard-wearing lacquer</b></p> <p>Low odour 100% polyurethane lacquer for wooden floors in heavy traffic residential areas and lighter traffic commercial floors. Offers the ease of use of a one component product with excellent leveling and flow characteristics.</p> <p>The product is ideal for use on previously sealed and untreated floors.</p>	<p><b>One-component water-based, hard wearing lacquer</b></p> <p>Low odour, 100% polyurethane lacquer for wooden floors. It is suitable for highly trafficked floors in commercial areas and provides a very cost effective solution where the exceptional scuff resistance of our HP lacquer may not be needed. StrongPlus is non yellowing and offers the ease of use of a one component lacquer and has excellent flow and leveling characteristics.</p> <p>StrongPlus is suitable for previously sealed as well as on new or fully sanded floors.</p>
<b>e</b> APPEARANCE	Creamy/milky in container. Colourless film when dry.	Creamy/milky in container. Colourless film when dry.	Creamy/milky in container. Colourless film when dry.
<b>+</b> GLOSS LEVEL	(10) Ultra Matt (20) Matt (50) Silk Matt (80) Gloss (only in 5 litre)	(10) Ultra Matt (only in 5 litres) (20) Matt (50) Silk Matt (80) Gloss (only in 5 litres)	(10) Ultra Matt (20) Matt (50) Silk Matt
<b>📏</b> COVERAGE	10-12 m <sup>2</sup> /litre.	10-12 m <sup>2</sup> /litre.	10-12 m <sup>2</sup> / litre.
<b>📦</b> PACKAGE SIZE	5 and 10 litres.	2½, 5 and 10 litres.	5 litres.
<b>L</b> DRYING TIME*	4 hours. Fully cured after 3 days. <b>Important!</b> Apply maximum 2 coats per day.	4 hours. Fully cured after 3 days. <b>Important!</b> Apply maximum 2 coats per day.	Approx. 3 hours. Fully cured after 3 days. <b>Important!</b> Apply maximum 2 coats per day.
<b>🔧</b> APPLICATION	Brush, short haired mohair roller, air/airless spray.	Brush, short hair mohair roller, air/airless spray.	Brush, roller, air/airless spray

# Added durability with two-component lacquers

Junckers two-component lacquers are particularly well-suited for high traffic areas. Our HP range sets the standard for just how durable water-based lacquers can be, and the fast drying time of the product makes it a perfect choice when time is all important. Junckers range of HP floor lacquers sets the standard in today's market, achieving the highest degree of wear resistance, and superior levelling properties over all other similar two-component water based products on the market.



## JUNCKERS PROTECH

ONE-COMPONENT SOLVENT-BASED LACQUER

### **ProTech is a product designed for professional use**

Provides a tough and hard wearing finish for machine sanded or untreated wooden floors.

Compared to other oil based products ProTech is easy and pleasant to use due to its low odour. ProTech highlights the warmer and richer colours in the wood, similar to oil, but with the benefits of a lacquer finish.

For use in high traffic areas.

## JUNCKERS PROFESSIONAL 625

TWO-COMPONENT SOLVENT-BASED FLOOR LACQUER

### **Quick-drying 2-component hard-wearing lacquer**

For professional use on wooden floors in high traffic commercial, and residential areas.

The product can be used on both previously sealed as well as on untreated or sanded floors.

Compared to similar products Junckers Professional 625 contains solvents with milder odour and solvency power.

## JUNCKERS HP COMMERCIAL

TWO-COMPONENT WATER-BASED FLOOR LACQUERS

### **Premium quality two-component non-yellowing water-based 100% polyurethane lacquer**

It is for use in very high traffic areas and is exceptionally durable and scuff resistant. It is non-yellowing, very fast curing and ready for use the following day.

HP Commercial lacquer must be mixed with HP Commercial Hardener before use.

## JUNCKERS HP FRICTION+

TWO-COMPONENT WATER-BASED FLOOR LACQUERS

### **A slip resistant two-component non-yellowing water based 100% polyurethane lacquer, based upon our HP Commercial lacquer**

Fast curing and ideal for use in high traffic areas where slip resistance is important, eg. restaurants and bars. HP Friction+ lacquer must be used as the final coat only.

HP Friction+ lacquer must be mixed with Junckers HP Friction+ Hardener before use.

Tested to BS7976-2:2002.



Colourless film when dry.

(20) Matt  
(50) Silk Matt  
(80) Gloss (Only in 5, 10 and 25 Litre)

8-10 m<sup>2</sup>/litre.

2½, 5, and 10 litres.

Approx. 6-8 hours.  
Light traffic: 24 hours.  
Maximum hardness achieved after one week.

Brush, mohair roller, air/airless spray.

Colourless film when dry.

(20) Matt  
(50) Silk Matt  
(80) Gloss

10 m<sup>2</sup>/ litre.

1.04 (1 + 0.04), 5.2 (5 + 0.2) and 10.4 (10 + 0.4) litres.

Recoating: 1½ hours.  
Light traffic: 24 hours.  
Fully cured after 3 days,

Brush, mohair roller, air/airless spray.

Creamy/milky in container. Colourless film when dry.

(10) Ultra Matt  
(20) Matt  
(50) Silk Matt  
(80) Gloss

10-12 m<sup>2</sup>/litre.

4.95 litres.  
(4½ litres and 0.45 litres)

Touch dry/recoating: Approx. 3 hours.  
Ready for light traffic: 8 hours.  
Fully cured after 3 days.

Brush, short haired mohair roller, air/airless spray.

Creamy/milky in container. Colourless film when dry.

(10) Ultra Matt

10-12 m<sup>2</sup>/litre.

4.95 litres.  
(4½ litres and 0.45 litres)

Touch dry/recoating: Approx. 3 hours.  
Ready for light traffic: 8 hours.  
Fully cured after 3 days.

Brush, short haired mohair roller, air/airless spray.

# LACQUER AND MAINTENANCE

FOR SPORTS FLOORS

**JUNCKERS TWO-COMPONENT HP SPORT LACQUER** is unequalled in quality and performance and is used on sports floors all over the world including Olympic and Commonwealth Games venues. It is very hard wearing and highly resistant to abrasion and scuffs. Along with our HP SportsLine paint the Junckers HP Sport range provides a complete system for refurbishment and maintenance of sports floors.

**JUNCKERS TAPEPRIMER**  
Protect the floor when using temporary adhesive tape for line markings or self-adhesive logos and lettering. Ask for Junckers TapePrimer.

LACQUER FOR SPORTS FLOORS



## JUNCKERS HP SPORT

## JUNCKERS HP SPORTSLINE

	JUNCKERS HP SPORT	JUNCKERS HP SPORTSLINE
<b>i</b> DESCRIPTION	<p><b>HP Sport is our premium quality two-component water-based 100% polyurethane lacquer</b></p> <p>For very high traffic sports floors. HP Sport is non-yellowing, extremely durable and scuff resistant, and very fast curing, so the floor is ready for use the next day. HP Sport complies with the friction requirements of EN 14904 for multi-purpose sports floors. Must be mixed with Junckers HP Sport Hardener before use.</p>	<p><b>A water based two-component line marking paint</b></p> <p>For painting court markings and other areas in gymnasiums and sports halls.</p> <p>The product is recommended for use on floors coated with Junckers HP Sport and on Junckers pre-finished lacquered floors.</p>
<b>👁</b> APPEARANCE	Creamy/milky in container. Colourless film when dry.	White, yellow, red, blue, green, black.
<b>★</b> GLOSS LEVEL/ COLOURS	(10) Ultra matt (20) Matt (50) Silk Matt	-
<b>📏</b> COVERAGE	10-12 m <sup>2</sup> /litre.	6-8 m <sup>2</sup> /litre.
<b>📦</b> PACKAGE SIZE	4.95 litres (4½ litres + 0.45 litres).	0.72 litres (0.65 + 0.065 litres). 2.2 litres (2 + 0.2 litres).
<b>L</b> DRYING TIME*	Touch dry/recoating: approx. 3 hours. Ready for light traffic: 8 hours. Fully cured after 3 days.	Recoating: 24 hours. Ready for light traffic: 8 hours. Fully cured after 3 days.
<b>🔧</b> APPLICATION	Brush, short haired roller, air/air-less spray.	Brush, short haired mohair roller or applicator.



# JUNCKERS HP SPORTSLINE - LINE MARKING PAINT

APPROVED ACCORDING TO EN 14904

After installation the sports floor only needs line markings and for this Junckers HP SportsLine is the perfect solution. Junckers water-based line marking paint is available in colours of white, red, green, blue, yellow and black. Colours may be mixed to provide more colours.



MAINTENANCE FOR  
SPORTS FLOORS



## JUNCKERS SYLVASPORT CLEANER

## JUNCKERS SYLVADISSOLVER H<sup>2</sup>O

## JUNCKERS SPORTS REFRESHER



### DESCRIPTION

**A universal cleaner for lacquered hardwood sports floors**

SylvaSport Cleaner does not leave a surface residue and is therefore ideal for regular use. To neutralize SylvaSport Cleaner and maintain slip resistance, use SylvaNeutralizer. Use a scrubber-dryer machine or apply by hand.

**Cleaner for removal of resin from lacquered wooden sports floors**

The product is used to soften handball resin before regular cleaning.

**Water based maintenance product**

For indoor wooden sports floors sealed with Junckers HP Sports lacquer. Revives a dull looking surface, hides minor scratches and protects the floor.

Friction and resistance to wear properties are tested and approved according to the European Sports standard EN 14904. Sports Refresher is specially formulated to allow it to be over coated with Junckers HP Sport lacquer.



### MIXING PROPORTIONS

50-200 ml to 10 litres of water

1 to 20 parts of water.  
Very dirty floors 1 to 10 parts of water.

-



### COVERAGE

-

-

20-25 m<sup>2</sup> per Liter.



### PH-VALUE / GLOSS LEVEL

Diluted: Approx. 6-8.  
Undiluted: Approx. 8.5

Undiluted: Approx. 11.  
Diluted: Approx. 8.

Silk-matt.



### PACKAGE SIZE

5 litres.

5 and 10 litres.

5 litres.



### DRYING TIME\*

-

-

Approx. 1-2 hours.  
Ready for light traffic after 3 hours.  
Apply only 2 coats per day.  
Fully cured after 72 hours.



### APPLICATION

Well wrung cloth or mop.

By sponge, cloth or mop.  
Cloth and atomizer or atomizer and washing machine.

Flat floor mop.

LACQUER AND MAINTENANCE

# OIL AND HARDWAX OIL

**JUNCKERS RUSTIC OILS AND HARDWAX OIL** add a beautiful deep sheen and superior wear resistance to the floor. Choose either a clear oil, which emphasizes the natural character of the wood, or one of our range of coloured oils, which allow you to create a unique look to your room or interior.

If you like the appearance of oil, but want the advantages of a lacquered surface, then you can combine Junckers Rustic Oil with HP Commercial lacquer.

## OIL AND HARDWAX OIL



	JUNCKERS RUSTIC OIL CLEAR	JUNCKERS RUSTIC SOLID 100	JUNCKERS PROFESSIONAL HARDWAX OIL
<b>i</b> DESCRIPTION	<p><b>Priming and finishing oil for untreated wooden floors and table-/worktops</b></p> <p>Rustic Oil Clear can be used in combination with Rustic Oil Colour.</p> <p>For interior use only.</p>	<p><b>An indoor oil product for untreated/sanded wooden floors and table-/worktops</b></p> <p>The oil is practically free from organic solvents.</p> <p>For interior use only.</p>	<p><b>An incredibly durable and fast drying oil for sanded or untreated wooden floors</b></p> <p>Gives the floor a deep lustre and rich colour and is perfect for residential or commercial areas. Also ideal for use in locations where minimum closure time is important. Can be used for both priming and for final polishing coats. An additional coat may be required on porous timbers.</p> <p>Hardwax Oil cannot be overcoated with water-based lacquers.</p> <p>For interior use only.</p>
<b>e</b> APPEARANCE	Clear – gives the wood a deep, warm glow.	Gives the wood a deep, warm glow.	Matt to Ultra matt.
<b>h</b> COVERAGE	10-50 m <sup>2</sup> /litre depending on wood structure and absorption.	Absorbing wood species: approx. 7.5 m <sup>2</sup> per litre. Less absorbing wood species: approx. 15 m <sup>2</sup> per litre.	20-30 m <sup>2</sup> /litre.
<b>l</b> PACKAGE SIZE	¾, 2½, 5, 10, 25 and 200 litres.	2½, 5 and 10 litres.	5 litres.
<b>L</b> DRYING TIME*	16-24 hours before applying the finishing coat. Ready for use 24 hours after the finishing coat. Fully cured after 3 days.	Minimum 16 hours. Ready for use 24 hours after the finishing treatment. Fully cured after 3 days.	Dry to touch at least 4 hours. Recoating approx. 6 hours. Buffing approx. 16 hours. Fully cured after 6 days.
<b>h</b> APPLICATION	Cloth, brush, roller, lambswool applicator or spray in combination with a nylon scouring pad for all types of surfaces.	Shorthaired roller in a medium thick layer.	Roller, brush or stainless steel spatula.



RawSugar



Anthracite



Cherry



Mahogany



Black



Walnut



DarkCoco



Nordic



White



SmoothRum



Driftwood Grey




WildHazel



Nut

# Junckers Rustic Oil Colour

With Rustic Oil Colour, you can keep and highlight the natural glow, or you can give a whole new look and an exciting atmosphere with the impressive range of beautiful colours.

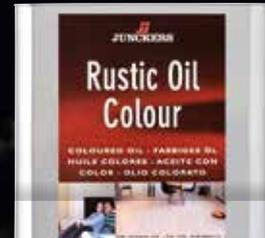

TIO

**JUNCKERS  
RUSTIC OIL COLOUR**



### DESCRIPTION

Indoor priming and finishing oil product for untreated wooden floors and table-/worktops

Junckers Rustic Oil, Colour can be used in combination with Rustic Oil, Clear.



### APPEARANCE

Coloured liquid that dries to a transparent coloured surface.



### COVERAGE

10-50 m<sup>2</sup> depending on wood structure and absorption.



### PACKAGE SIZE

0.375 and 2.5 litre.  
White and black also 0,75 and 5 litre. Cherry also 0,75 litre.



### DRYING TIME\*

16-24 hours before applying the finishing oil. Ready for use 24 hours after the finishing treatment. Fully cured after 3 days.



### APPLICATION

Cloth, brush, roller or lambswool applicator in combination with a nylon scouring pad for all types of surfaces.

OIL AND HARDWAX OIL

# CLEANING AND MAINTENANCE

CLEANING



## JUNCKERS SYLVACLEANER

## JUNCKERS SYLVANEUTRALIZER

<p><b>i</b> DESCRIPTION</p>	<p><b>A universal cleaning product</b></p> <p>For daily or periodic cleaning of lacquered and oiled wood floors. SylvaCleaner has been developed to dissolve surface dirt and to dry quickly.</p> <p>SylvaCleaner does not leave a film or residue on the floor.</p>	<p><b>For cleaning wood floor surfaces before maintaining with lacquer or oil.</b></p> <p>SylvaNeutralizer dries quickly and neutralises the surface after cleaning with Junckers SylvaCleaner.</p> <p>It is not necessary to clean the floor afterwards with water.</p>
<p><b>e</b> APPEARANCE</p>	<p>Colourless</p>	<p>Colourless</p>
<p><b>e</b> PH-VALUE</p>	<p>Diluted: Approx. 6-8. Undiluted: Approx. 8.5.</p>	<p>Diluted: approx. 3 Undiluted: approx. 2</p>
<p><b>e</b> MIXING PROPORTIONS</p>	<p>50-200 ml per 10 litres of water.</p>	<p>200 ml per 10 litres of water.</p>
<p><b>e</b> PACKAGE SIZE</p>	<p>1, 2½ and 5 litres.</p>	<p>1 litre.</p>
<p><b>L</b> DRYING TIME*</p>	<p>Approx. 5 minutes.</p>	<p>Approx. 5 minutes.</p>
<p><b>e</b> APPLICATION</p>	<p>Well wrung out cloth or mop.</p>	<p>Well wrung out cloth or mop.</p>



MAINTENANCE



**JUNCKERS REFRESHER**

**JUNCKERS RUSTIC TOP OIL**

	<b>JUNCKERS REFRESHER</b>	<b>JUNCKERS RUSTIC TOP OIL</b>
<b>i</b> DESCRIPTION	<p><b>A water based maintenance lacquer</b></p> <p>For indoor wooden floors sealed with one of Junckers water or oil based lacquers.</p> <p>Suited for domestic and commercial areas.</p> <p>Revives a dull looking surface, hides minor scratches and protects the floor.</p>	<p><b>A surface maintainer</b></p> <p>For use on floors which have been treated with Junckers Rustic Oil.</p> <p>TopOil is easy to apply and fast drying so the floor is ready for use after 30 to 60 minutes.</p> <p>TopOil protects the surface, restores a uniform sheen to the floor and reduces the effects of scratches and abrasions.</p>
<b>👁</b> APPEARANCE	Creamy/milky in the container. Colourless film when dry.	Dries to colourless ultra matt appearance.
<b>🌟</b> GLOSS LEVEL	Silk Matt	Ultra Matt
<b>📏</b> COVERAGE	20-25 m <sup>2</sup> per litre.	30-50 m <sup>2</sup> per litre.
<b>📦</b> PACKAGE SIZE	2½ and 5 litres.	Black: 2.5 litres. Clear: 1, 2½ and 10 litres.
<b>🕒</b> DRYING TIME*	Approx. 1-2 hours. Ready for light traffic after 3 hours. Fully cured after 3 days.	Ready for light traffic after 30-60 minutes. Fully cured after 24 hours.
<b>🔧</b> APPLICATION	Flat floor mop.	Flat floor mop or cotton cloth.


**ACCESSORIES**



Junckers Multi 25 roller  
10 pcs. per box



Junckers Aqua 25 roller  
10 pcs. per box

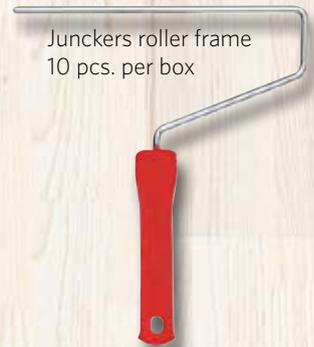

Junckers roller frame  
10 pcs. per box

Junckers Telescopic roller pole



## Lacquered Floors

### GENERAL DESCRIPTION

Junckers prefinished lacquered floors have a very hard-wearing factory applied polyurethane lacquer surface, and normally require no treatment prior to use. The life span of a lacquered floor largely depends on proper cleaning and maintenance. In some high traffic commercial areas and/or those subject to spillage, consideration should be given to a further coat of Junckers lacquer to give extra protection to the floor.

### CLEANING AND MAINTENANCE - DAILY/WEEKLY

Vacuum and/or sweep the floor to remove surface dust and grit. Clean the floor with a mild solution of Junckers SylvaCleaner, using a well wrung out cloth or a hand held sprayer and flat mop kit. For larger floors use a scrubber dryer machine using correct mix of SylvaCleaner. Newly lacquered floors should not be cleaned for at least 72 hours after lacquering.

#### Important!

**Always use as little water as possible for cleaning. Use a well wrung out cloth or mop and remove excess water immediately. Wipe up any spillage of water as soon as possible to prevent the wood becoming damaged. An extra coat of seal can reduce the likelihood water damage.**

### COMMERCIAL FLOOR MAINTENANCE

Junckers recommends a 12-24 month inspection after installation of the floor to assess its condition and the likely maintenance requirements for the future.

If the surface is very dull and worn then a coat of Junckers lacquer or Refresher may be required to maintain protection of the floor.

Junckers Refresher may also be used between periodic applications of lacquer to maintain the appearance of the floor.

The floor should first be cleaned with Junckers SylvaCleaner, then abraded. After removing the dust the floor must be resealed with the appropriate Junckers product. Note that abrading and cleaning are crucial to allow the new coatings to adhere properly.

For daily/weekly cleaning use Junckers SylvaCleaner in accordance with the instructions. Refresher may be used when the surface appears dull.

#### Important!

**Floors previously treated with wax or polish must be machine-sanded before resealing.**

### PERIODIC MAINTENANCE - DOMESTIC FLOORS

Clean the floor using Junckers SylvaCleaner then apply a thin coat Junckers Refresher to the clean surface. The frequency of cleaning depends upon foot traffic levels.

### FURTHER TECHNICAL INFORMATION

See [junckers.com](http://junckers.com)



## Oil Treated Floors

### GENERAL DESCRIPTION

Junckers prefinished oiled floors have a factory applied finish, and are ready for use immediately after installation. If any minor scratches and scuffs have occurred during installation, follow the procedure described under "Spot Repair".

### CLEANING AND MAINTENANCE - DAILY/WEEKLY

Vacuum or sweep the floor to remove surface dust and grit. Clean the floor when required with Junckers Sylvacleaner. Use a well wrung out cloth or a hand held sprayer in combination with a rotary polishing machine mounted with a soft (white) nylon pad. Alternatively a Rotowash machine may be used.

#### Important!

**Always use as little water as possible for cleaning. Cloths or mops must be well wrung out, and any excess water on the floor removed immediately. Wipe up any spillage of water as soon as possible to prevent damage to the wood.**

### LONGER TERM MAINTENANCE

1. Clean extremely dirty floors with a black nylon scrubbing pad slightly wetted with a solution of Junckers SylvaCleaner.  
Treat only 2-3 m<sup>2</sup> at a time and wipe up the dirty water immediately. Repeat if necessary until the floor is clean.
2. Apply a coat of Junckers Rustic Oil using a long handled brush or a spray. 1 litre covers approx. 50-100m<sup>2</sup>.
3. After approximately 5 minutes, apply more oil to any matt or

dry-looking areas.. Oil from wetter areas may be wiped onto drier looking parts of the floor.

4. After a maximum of 30 minutes of soaking time wipe away any surplus oil with a clean, dry cloth.
5. Buff the floor using a soft nylon pad wrapped with a clean cloth until the surface has a uniform sheen.
6. leave the floor to dry for 16 to 24 hours before use.

### PERIODIC MAINTENANCE

1. Clean the floor thoroughly with Junckers SylvaNeutralizer and ensure the floor is allowed to dry completely.  
If the floor is very worn or dirty follow the routine under "Longer Term Maintenance".
2. Abrade the floor with a black nylon buffing pad or 150 grit mesh disc.

3. Apply a thin coat of Junckers Rustic TopOil on the surface, depending upon the range of oils used.
4. Leave the floor to dry.
5. Repeat the application of Junckers Rustic TopOil if the surface is still dull and patchy.

### SPOT REPAIR

Scratches: apply Junckers Rustic TopOil with a soft cloth.  
Deep scratches: apply Junckers Rustic Oil as described under "Longer Term Maintenance", sections 2-4.

#### Very important!

**Do not cover freshly oiled floors with plastic or other types of non-porous protection as this will prevent the oil from curing properly. Oiled floors which have been treated with wax or polish must be machine-sanded before treatment with Junckers Rustic Oil products.**

**JUNCKERS INDUSTRIER A/S**

Værftsvej 4

DK-4600 Køge

Tel. +45 7080 3000

**[www.junckers.com](http://www.junckers.com)**